

Intelligent Tunable White LED Driver (Constant Voltage)

- Small size and light weight. The housing is made from V0 flame retardant PC materials from SAMSUNG/COVESTRO.
- The clamshell design and screwless type for strain-relief. The design of dismountable end cap allows you to adjust the length of housing depending on your needs.
- Adopt constant power design that can adjust different color temperature while brightness remains the same.
- Adjustable color temperature: 1000-10000K (factory default: 2700-6500K)
- Dimming from 0~100%, down to 0.1%.
- 2 SELV output channels with common anode.
- The secure and reliable design for signal isolation.
- Overheat, over voltage , overload, short circuit protection and automatic recovery.
- Suitable for Class I / II /III indoor light fixtures.
- Up to 50,000-hour life time.
- 5-year warranty (Rubycon capacitor).



DIM / CT

Flicker-Free
IEEE 1789Dimmable:
0.1%-100%


Specification

Model		LM-75-12-G2D2		LM-75-24-G2D2		LM-100-24-G2D2	
OUTPUT	Output Voltage	12Vdc		24Vdc			
	Output Voltage Range	12Vdc ±0.5Vdc		24Vdc ±0.5Vdc			
	Output Current	Max. 6.25A		Max. 3.125A		Max. 4.17A	
	Output Power	Max. 75W				Max. 100W	
	Output Power Range	0~75W				0~100W	
	Strobe Level	High frequency exemption level.					
	Dimming Range	0~100%, dimming depth: Max. 0.1%					
	Overload Power Limitation	≥102%					
	Ripple & Noise	≤200mV		≤300mV			
PWM Frequency	3600Hz						
INPUT	Dimming Interface	DALI-2 DT6/DT8, Push DIM/CCT					
	Input Voltage	220-240Vac					
	Frequency	50/60Hz					
	Input Current	Max. 0.4A/230Vac				Max. 0.5A/230Vac	
	Power Factor	PF>0.97/230Vac, at full load				PF>0.98/230Vac, at full load	
	THD	≤14% at 230Vac, at full load				≤12% at 230Vac, at full load	
	Efficiency [typ.]	91%		92%		93%	
	Inrush Current[typ.]	Cold start 30A at 230Vac				Cold start 45A at 230Vac	
	Control surge capability	L-N:2KV					
	Leakage Current	Max. 0.5mA					
ENVIRONMENT	Working Temperature	ta: -20°C ~ 50°C tc: 80°C					
	Working Humidity	20 ~ 95%RH, non-condensing					
	Storage Temp., Humidity	-40°C ~ 80°C, 10~95%RH					
	Temp. Coefficient	±0.03%/°C [0-50°C]					
	Vibration	10~500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes					
PROTECTION	Over-heat Protection	Intelligently adjusting or turning off the output current if the PCB temperature ≥110°C, auto recovers					
	Over Voltage Protection	Shut down the output when non-load voltage ≥13V, re-power on to recover after fault condition is removed		Shut down the output when non-load voltage≥26V, re-power on to recover after fault condition is removed			
	Over Load Protection	Shut down the output when current load≥102%, auto recovers.					
	Short Circuit Protection	Shut down automatically if short circuit occurs, auto recovers.					
SAFETY & EMC	Withstand Voltage	I/P-O/P: 3750Vac					
	Isolation Resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH					
	Safety Standards	CCC	China	GB19510.1, GB19510.14			
		CB	CB member states	IEC61347-1, IEC61347-2-13			
		RCM	Australia	AS 61347-1, AS 61347-2-13			
		UKCA	Britain	BS EN 61347-2-13:2014+A1:2017, BS EN 61347-1:2015+A1:2021			
		TUV	Germany	EN61347-1, EN61347-2-13, EN62493			
		CE	European Union	EN61347-1, EN61347-2-13, EN62384			
	EMC Emission	CCC	China	GB/T17743, GB17625.1			
		RCM	Australia	EN55015, EN61000-3-2, EN61000-3-3, EN61547			
		UKCA	Britain	BS EN IEC 55015:2019/A11:2020, BS EN 61547:2009, BS EN IEC 61000-3-2:2019, BS EN 61000-3-3:2013/A1:2019			
		CE	European Union	EN55015, EN61000-3-2, EN61000-3-3, EN61547			
	EMC Immunity	EN61000-4-2,3,4,5,6,8,11 EN61547					
	Strobe Test Standard	IEEE 1789					
OTHERS	Dimension	293×43×30mm[L×W×H]					
	Packing	296×44×33mm[L×W×H]					
	Weight[G.W.]	300g±10g					

* The driver is suitable for connecting resistor current-limiting LED fixture (e.g. LED strip). The inrush current will be dozens of times increased if connecting built-in constant current IC current-limiting LED fixtures, the driver will activate the overloaded protection (hiccup flickering). When you order, please remark controlling the constant current LED fixture (e.g. MR16 lamp, underground light, LED wall washer, constant current LED strip, etc.), then we can prepare the special programs.

Dimensions

Unit: mm

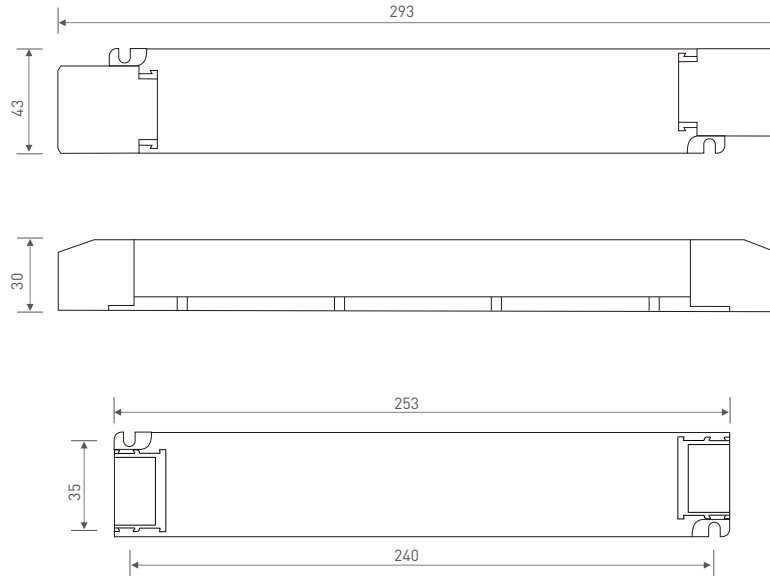


Wiring Diagram

DALI Connection



Push DIM/CCT Connection

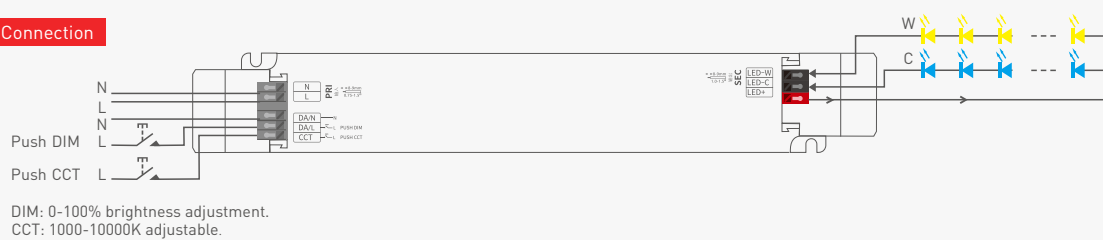


* Dimming interface priority: First DALI, next Push DIM/CCT.

* Adopting constant power program design, it keeps the same brightness in color temperature dimming, twice the rated power load can be connected.

75W driver, 75W X 2CH load can be connected, the total power of the 2 channels will be kept in 75W.

100W driver, 100W X 2CH load can be connected, the total power of the 2 channels will be kept in 100W.



E.g.: LM-75-12-G2D2

Push DIM/CCT



Reset switch

DIM



- On/off control: Short press.
- Stepless dimming: Long press.
- With every other long press, the light level goes to the opposite direction.
- Dimming memory: Brightness will be the same as previously adjusted when turning off and on again.

CCT

- Color temperature adjustment: Long press.
- With every other long press, the color temperature level goes to the opposite direction.
- Color temperature memory: Color temperature will be the same as previously adjusted when turning off and on again.

Protective Housing Application Diagram

Tension plate




1. Pry up the protecting housing in the side plate position with a tool.

2. Connect to electrical wires with a screwdriver as wiring diagram shows.


3. Press down the tension plate to fix the electrical wires, then close the protective housing.

Remove the protective housing





Pull the housing left and right from the bottom to remove it.


Installation Precautions







Please do not stack the products. The distance between two products should be $\geq 15\text{cm}$ so as not to affect heat dissipation and the lifespan of the products.







Please not place the products on LED drivers. The distance between the product and the driver should be $\geq 15\text{cm}$ so as not to affect heat dissipation and shorten the lifespan of the products.







Relationship Diagrams

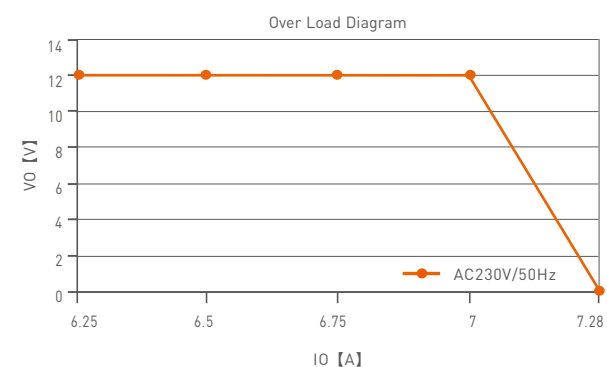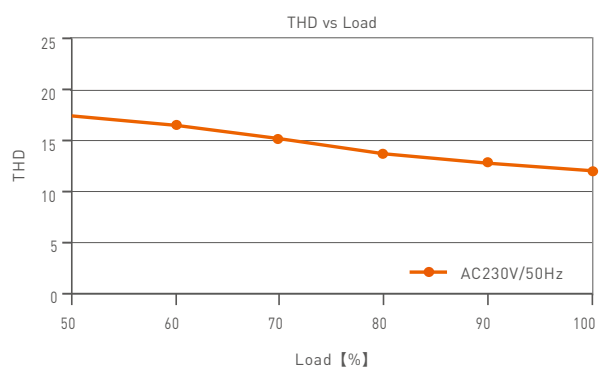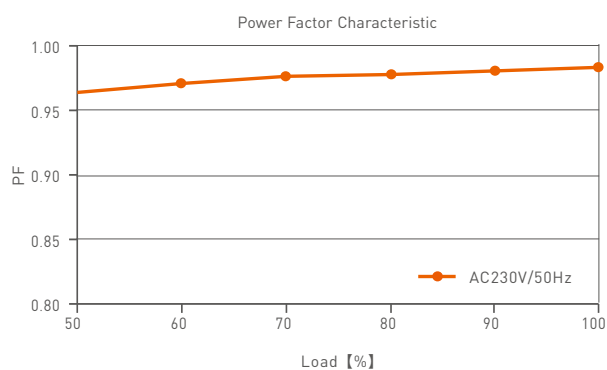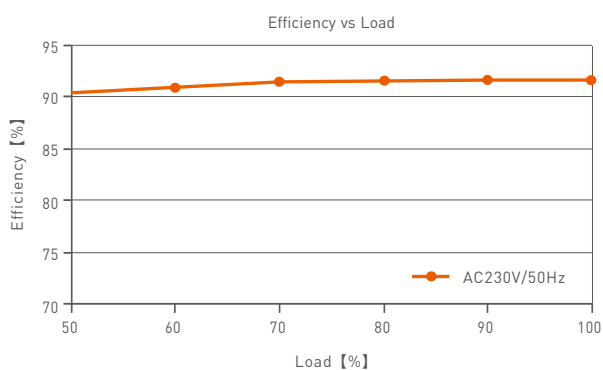

LM-75-12-G2D2

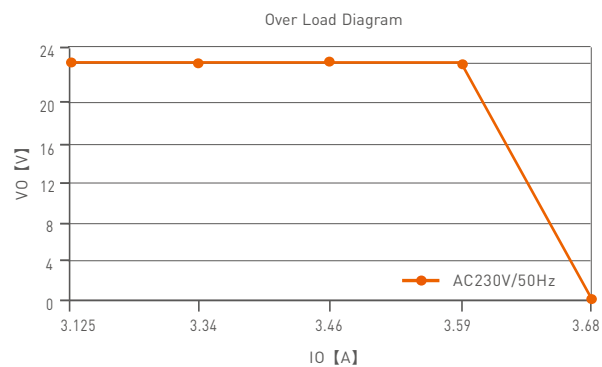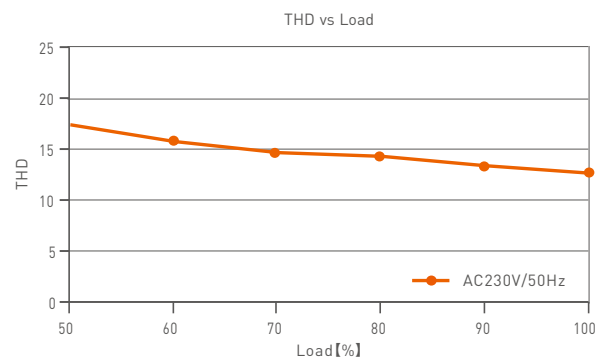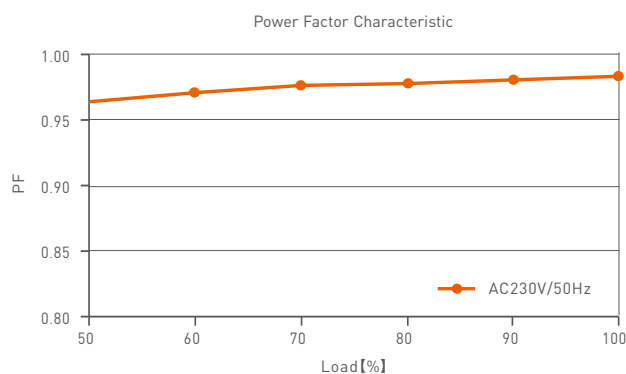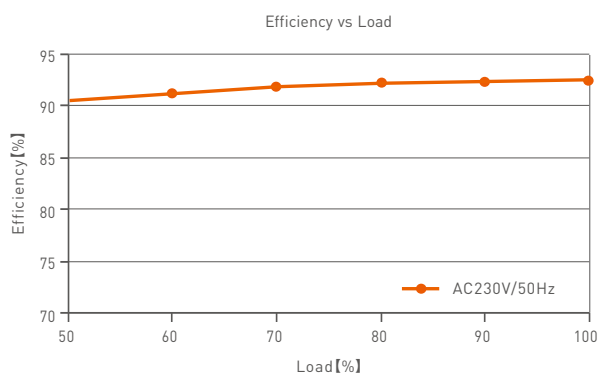

LM-75-24-G2D2

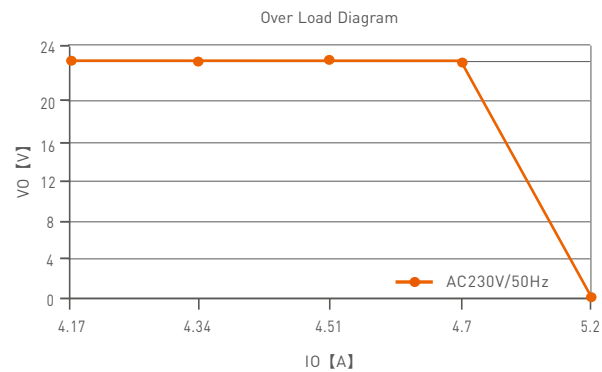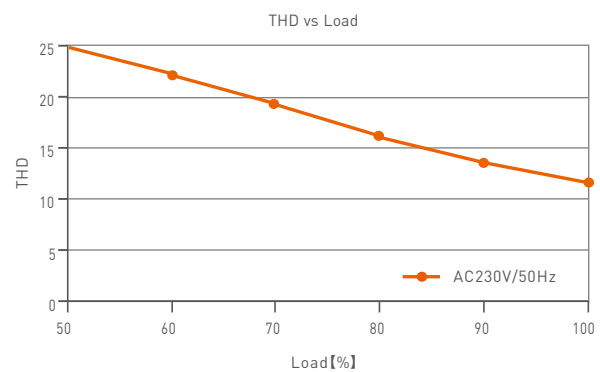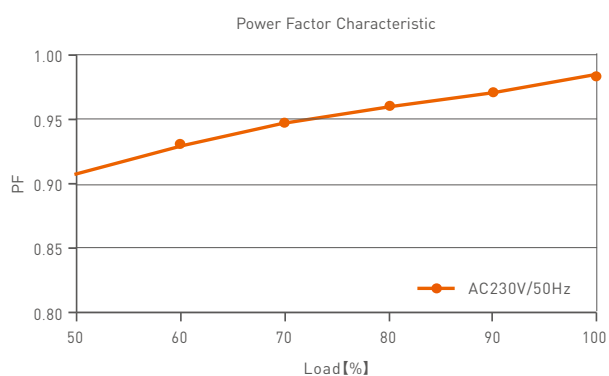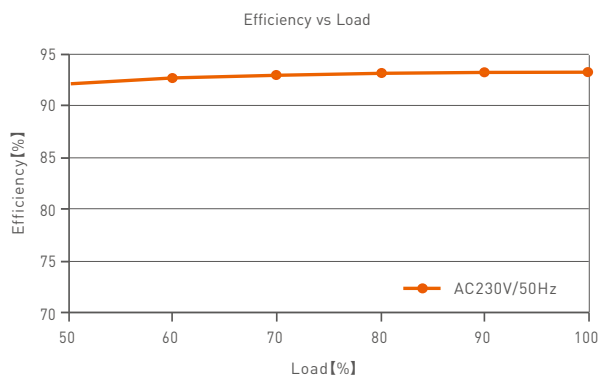

LM-100-24-G2D2


Flicker Test Form

IEEE 1789

Limit of Modulation in low risk area	
Waveform frequency of Optical output	limit (%)
$f \leq 8\text{Hz}$	0.2
$8\text{Hz} < f \leq 90\text{Hz}$	$0.025 \times f$
$90\text{Hz} < f \leq 1250\text{Hz}$	$0.08 \times f$
$f > 1250\text{Hz}$	Exemption assessment
Limit of Modulation in no effect area	
Waveform frequency of Optical output	limit (%)
$f \leq 10\text{Hz}$	0.1
$10\text{Hz} < f \leq 90\text{Hz}$	$0.01 \times f$
$90\text{Hz} < f \leq 3125\text{Hz}$	$(0.08/2.5) \times f$
$f > 3125\text{Hz}$	Exemption assessment (High frequency exemption)

Brightness

- ▲ 0.1 %
- ▲ 1 %
- ▲ 5 %
- ◆ 10 %
- 20 %
- ▲ 30 %
- 40 %
- ★ 50 %
- 60 %
- 70 %
- 80 %
- ★ 90 %
- ◆ 100 %

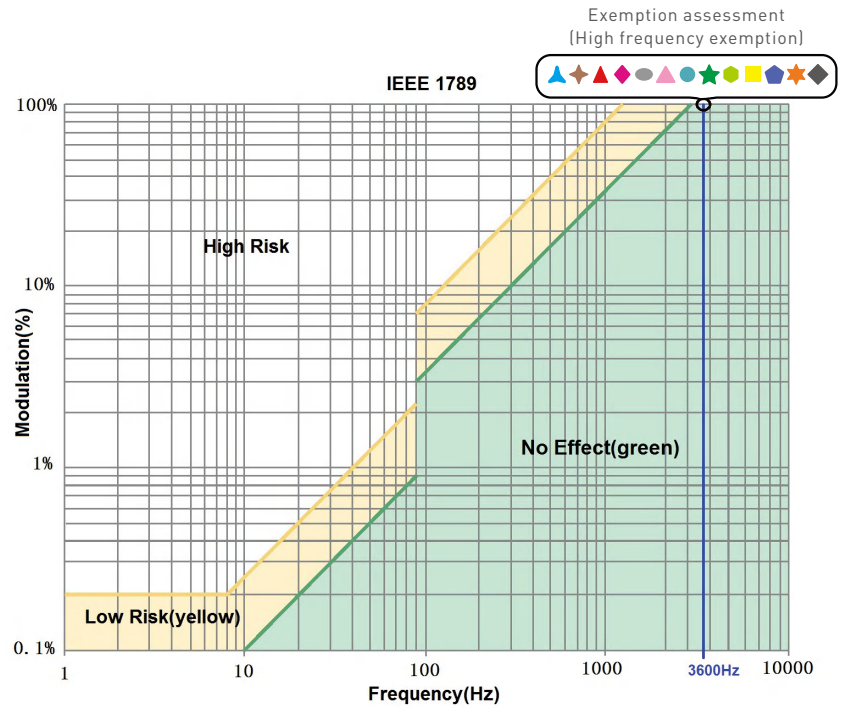

Attentions

- This product must be installed and adjusted by a qualified professional.
- This product is non-waterproof (special models excepted). Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
- Good heat dissipation will extend the life the product. Please install the product in a environment with good ventilation.
- When you install this product, please avoid being near a large area of metal objects or stacking them to prevent signal interference.
- Please keep the product away from a intense magnetic field, a high pressure area or a place where lightning is easy to occur.
- Please check whether the working voltage used complies with the parameter requirements of the product.
- Before you power on the product, please make sure all the wiring is correct in case of incorrect connection that may cause a short circuit and damage the components, or trigger a accident.
- If a fault occurs, please do not attempt to fix the product by yourself. If you have any question, please contact the supplier.

* This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our official distributors if you have any question.

Warranty Agreement

- Warranty periods from the date of delivery: 5 years.
- Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
- Any artificial damage caused by high voltage, overload, or improper operations.
- Products with severe physical damage.
- Damage caused by natural disasters and force majeure.
- Warranty labels and barcodes have been damaged.
- No any contract signed by LTECH.

- Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
- LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.

Update Log

Version	Updated Time	Update Content	Updated by
A0	2020.09.10	Original version	Liu Weili
A1	2021.04.30	Add product feature description; update product silk screen, update TUV certification icon	Liu Weili
A2	2021.12.10	Update product silk screen	Liu Weili
A3	2022.06.07	Update protective housing application diagram	Liu Weili
A4	2024.02.19	Updated color temperature range	Li Siyu