



Features:

- European AC input / (198-264VAC)
- Built-in active PFC function.
- IP20 rated, suitable for indoor environment
- Protections: Short circuit / Over temperature / Over voltage
- Full Lighting approvals
- Warranty 5 years



Models

ECP320-24VL

Output Specifications

Output Voltage	24V
Voltage Tolerance	<+5%
Output Current	13.3A
Rated Power	320W

Input Specifications

Input Voltage	198-264VAC
Frequency Range	50-60Hz
Inrush Current	<92A
Full Load Efficiency (Typ.)	84%
AC Current (Max.)	0.22A
Power Factor	0.95 @ Full Load

Protection

Short Circuit	hiccup mode, restart automatically after fault correction
Over Loading	hiccup mode, restart automatically after fault correction
Over Temperature	Yes(latch off)
Protection Class	II

Environment

Working Temperature	-20~+45°C (Refer to derating curve), +85°C (max case temp.)
Working Humidity	45-85%

Safety & EMC

Safety standards	EN613471, EN61347-2-13
------------------	------------------------


Safety & EMC

EMS	EN61000-3-2; EN61000-3-3; EN61547
EMF	EN62493-2010
ERP	EN1194-2012

Other Specifications

IP Rating	IP20
Weight	0.8 Kg
Size	215 x 77.5 x 35 mm

Mechanical Specifications

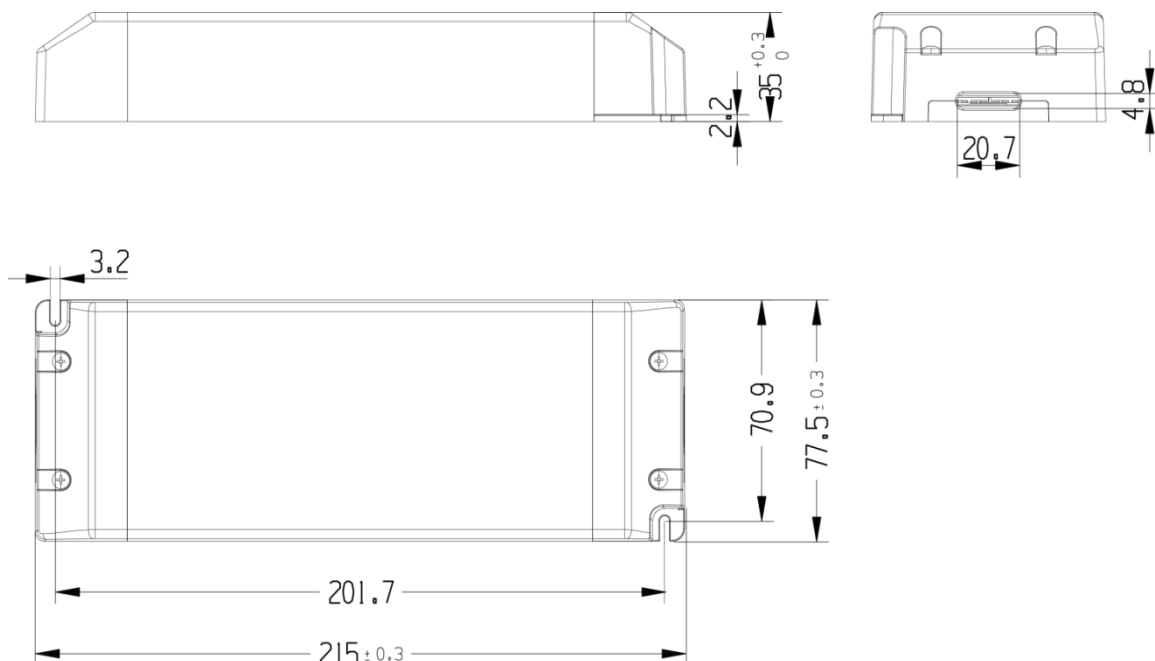

Wiring Diagram

